



MACHINE UNLOADING MATERIAL

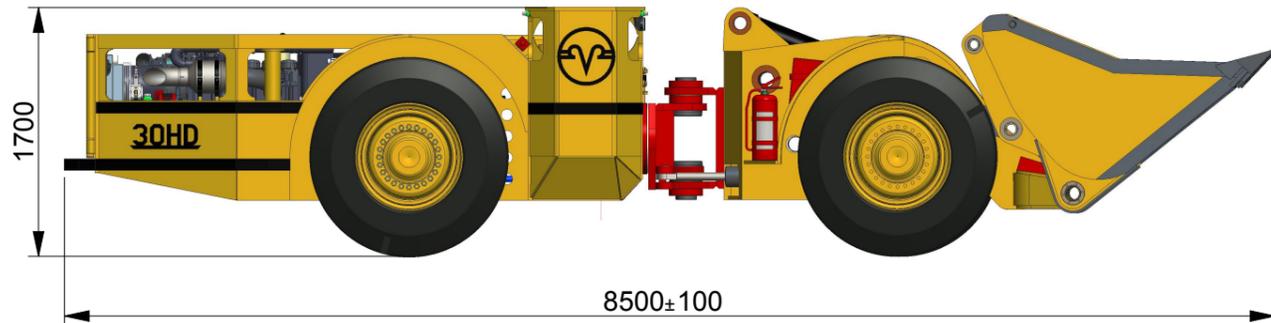

MACHINE TRANSPORTING MATERIAL

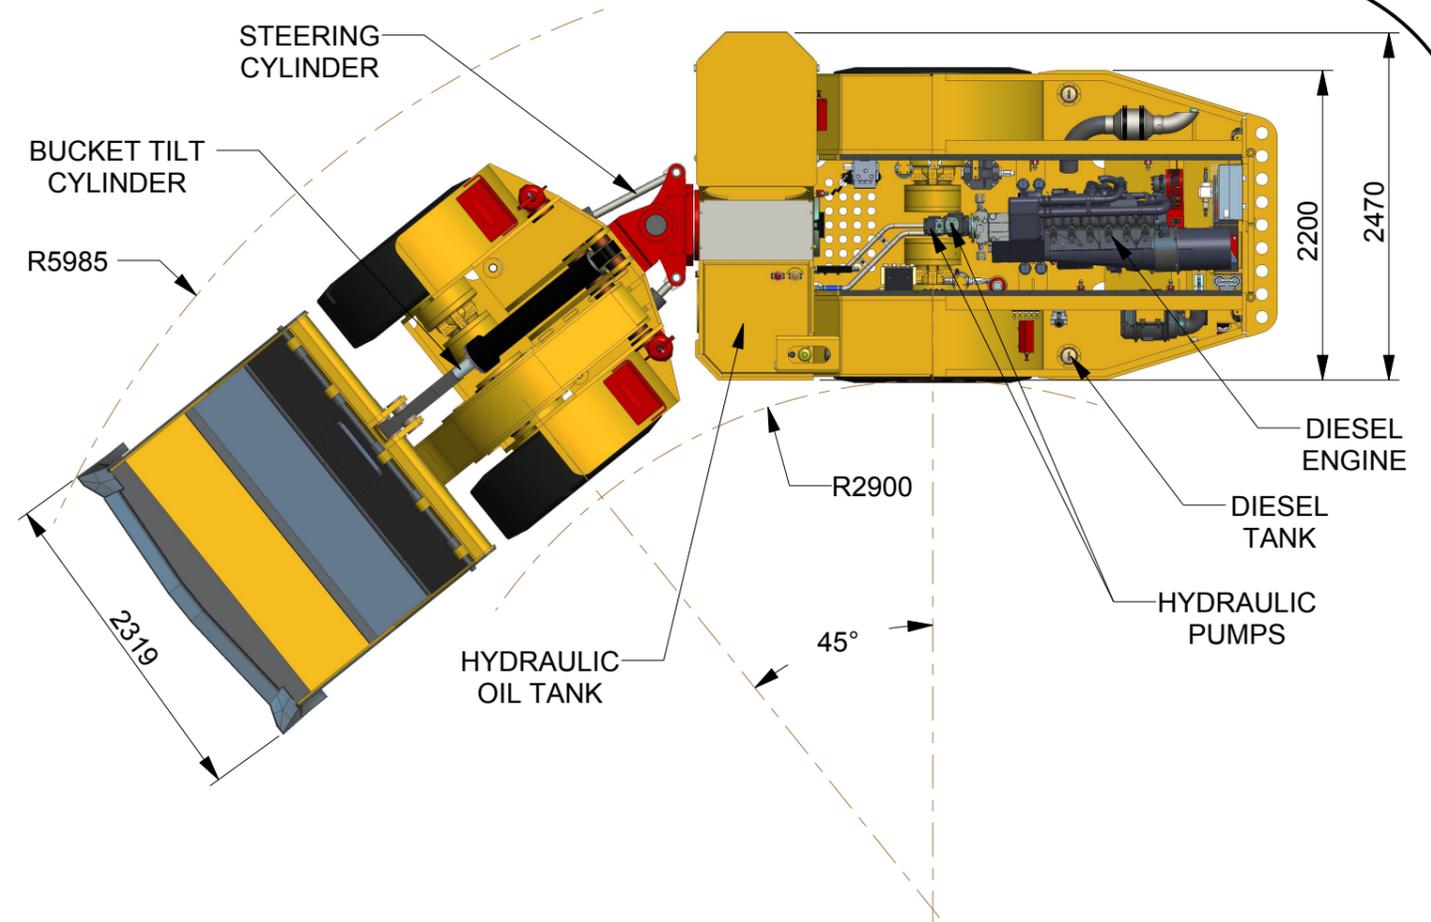

SPECIFICATIONS

DIMENSIONS

Width = 2470mm(\*)  
 Height = 1700mm(\*)  
 Length = 8500mm(\*)  
 Ground Clearance = 336mm(\*)  
 Turning Circle Inner = 2900mm(\*)  
 Outer = 5985mm(\*)

GENERAL DATA

Tramming Speed (1ST) = 5.0Km/h (\*\*)  
 Tramming Speed (2ND) = 13.0 Km/h (\*\*)  
 Electrical System = 24V

BUCKET

Tramming Capacity = 7500Kg  
 Bucket Capacity = 3.4m<sup>3</sup>(+)  
 Ejector Bucket Capacity = 3.0m<sup>3</sup>(+)

ENGINE

Type : Deutz (Air Cooled) BF6L914C  
 Power Output : 114KW@2300RPM  
 Exhaust Diluter  
 Engine Protection System (Lubrivent)

OPTIONAL

Fire Suppression System

NOTES

# HEIGHT OF MACHINE WILL VARY DUE TO SETUP  
 OPTIONS I.E FOAM FILLING AND TYRE TYPE  
 \* LENGTHS AND WIDTHS WILL VARY DUE TO  
 MANUFACTURING TOLERANCES  
 \*\* SPEED OF MACHINE WILL VARY  
 DUE TO TYRE CHOICE  
 + BUCKET CAPACITY OF MACHINE WILL VARY DUE  
 TO MATERIAL TYPE LOADED



NOTE: THIS DRAWING IS FOR ILLUSTRATIVE  
 PURPOSES ONLY. THE LAYOUT AND SPECIFICATIONS  
 MAY ALTER TO SUIT REQUIREMENTS.

LHD MODEL 30HD MK  
**RHAM EQUIPMENT**

10/10/2012  
 REA1168D